



6F7

RCA-6F7

TRIODE-PENTODE

Heater * Coated Uni-potential Cathode
 Voltage 6.3 a-c or d-c volts
 Current 0.3 amp.

Direct Interelectrode Capacitances:

Triode Unit:
 Grid to Plate 2.0 μf
 Grid to Cathode 2.5 μf
 Plate to Cathode 3.0 μf

Pentode Unit:
 Grid to Plate 0.008 max. [⊙] μf
 Input 3.2 μf
 Output 12.5 μf

Overall Length 4-9/32" to 4-17/32"

Maximum Diameter 1-9/16"

Bulb ST-12

Cap Small Metal

Base Small 7-Pin [△]

Pin 1-Heater Pin 5-Triode Grid
 Pin 2-Pentode Plate Pin 6-Cathode
 Pin 3-Pentode Screen Pin 7-Heater
 Pin 4-Triode Plate Cap - Pentode Grid

BOTTOM VIEW

AMPLIFIER SERVICE

	Triode Unit	Pentode Unit	
Plate Voltage	100 max.	100 250 max.	volts
Screen Voltage	-	100	100 max. volts
Grid Voltage	-3	-3	-3 min. volts
Amp. Fact.	8	300 900	
Plate Res.	16000	290000 850000	ohms
Mut. Cond.	500	1050 1100	μmhos
Mut. Cond. at -35 volts bias	-	9 10	μmhos
Plate Cur.	3.5	6.3 6.5	ma.
Screen Cur.	-	1.6 1.5	ma.

CONVERTER SERVICE

	Triode Unit	Pentode Unit	
Plate Voltage	100 max.	250 max.	volts
Screen Voltage	-	100	100 max. volts
Grid Voltage	##	-3	min.* volts
Oscillator Plate Cur. (av.)	4 max.	-	ma.
Typical Operation:			
Plate	100 [⊙]	250	volts
Screen	-	100 ^{⊙⊙}	volts
Grid Bias	##	-10 ^{⊙⊙}	volts
Plate Resistance	-	2	megohms
Conversion Conductance	-	300	μmhos
D-c Plate Current	2.4	2.8	ma.
D-c Grid Current	0.15	0	ma.
Screen Current	-	0.6	ma.
Oscillator Peak Voltage Input	-	7	volts


- ## Usually obtained by means of a grid leak.
- ** Grid bias should be at least .3 volts greater than the peak oscillator voltage applied to the pentode grid.
- ⊙ May be obtained from 250-volt source through 60000-ohm dropping resistor.
- ⊙⊙ Obtained by means of 1700-ohm self-biasing (cathode) resistor.
- * In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.
- △ Requires different socket than medium 7-pin base.
- With shield-can.

6F7



RCA-6F7

TYPICAL CIRCUITS

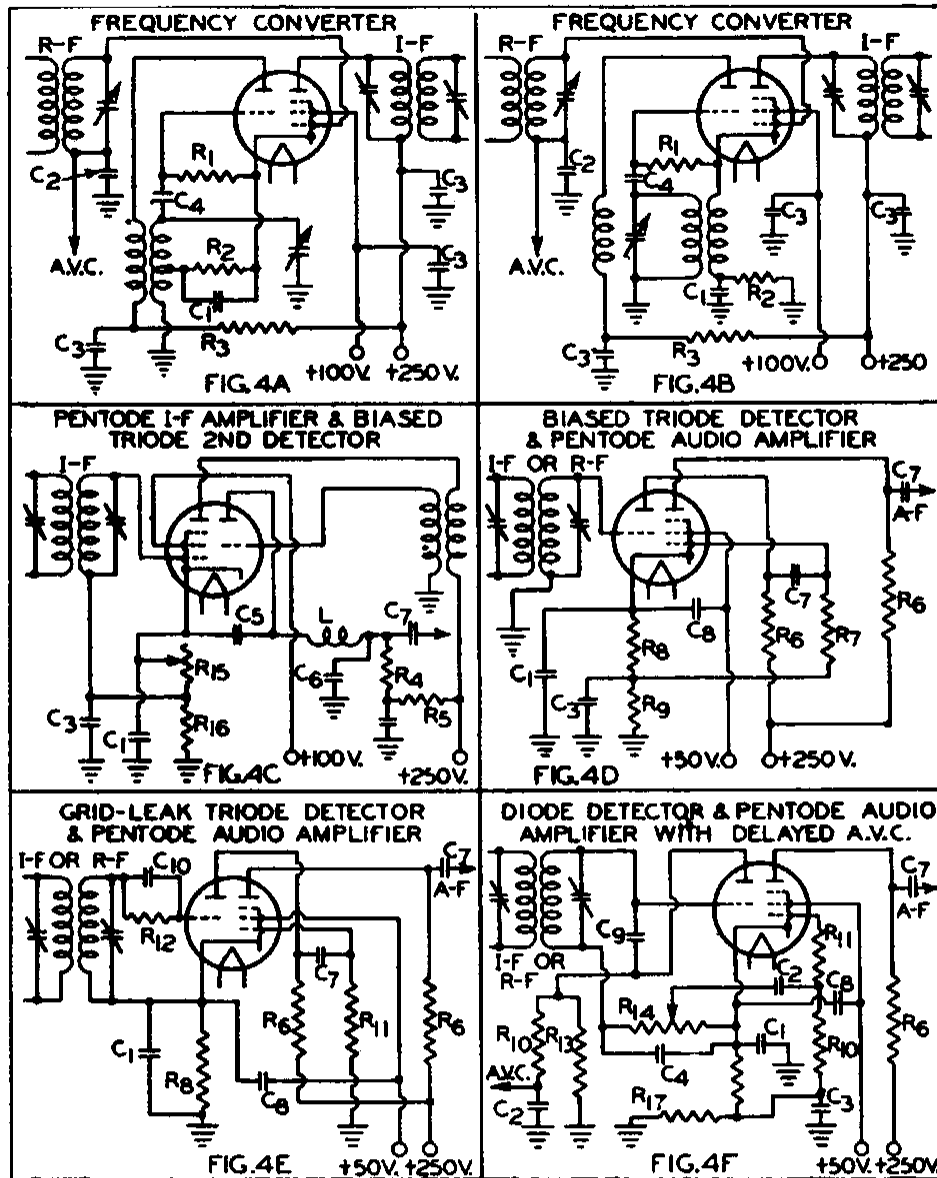


APPROXIMATE VALUES

$C_1 = 5 \mu\text{f}$
 $C_2 = 0.05 \mu\text{f}$
 $C_3 = 0.1 \mu\text{f}$
 $C_4 = 0.0002 \mu\text{f}$
 $C_5 = 0.0024 \mu\text{f}$
 $C_6 = 0.00016 \mu\text{f}$
 $C_7 = 0.01 \mu\text{f}$
 $C_8 = 0.5 \mu\text{f}$
 $C_9 = 0.0005 \text{ TO } 0.001 \mu\text{f}$
 $C_{10} = 0.00025 \mu\text{f}$
 $L = \text{I-F CHOKE COIL}$
 $R_1 = \text{OSCILLATOR GRID LEAK-0.1 MEGOHM}$

$R_2 = \text{PENTODE SELF-BIASING RESISTOR-1500 OHMS}$
 $R_3 = \text{VOLTAGE DROPPING RESISTOR-50000 OHMS}$
 $R_4 = \text{PLATE COUPLING RESISTOR-170000 OHMS}$
 $R_5 = \text{FILTER RESISTOR-30000 OHMS}$
 $R_6 = \text{PLATE COUPLING RESISTOR-300000 OHMS}$
 $R_7 = \text{PENTODE GRID LEAK-0.5 MEGOHM}$
 $R_8 = \text{PENTODE SELF-BIASING RESISTOR-5000 OHMS}$
 $R_9 = 10000 \text{ OHMS. } R_9 + R_8 = \text{TRIODE BIASING RESISTOR}$
 $R_{10} = \text{FILTER RESISTOR-1.0 MEGOHM}$
 $R_{11} = \text{GRID RESISTOR-500000 OHMS}$
 $R_{12} = \text{TRIODE GRID LEAK-1.0 MEGOHM}$
 $R_{13} = \text{A.V.C. DIODE LOAD-1.0 MEGOHM}$
 $R_{14} = \text{A-F DIODE-LOAD POTENTIOMETER-0.5 MEGOHM}$
 $R_{15} = \text{PENTODE SELF-BIASING RES. 4000 OHMS VAR.}$
 $R_{16} = 1500 \text{ OHMS. } R_{16} + R_{15} = \text{TRIODE BIASING RESISTOR}$

The license extended to the purchaser of tubes appears in the License Notice accompanying them. Information contained herein is furnished without assuming any obligations.

AVERAGE PLATE CHARACTERISTICS
TRIODE UNIT

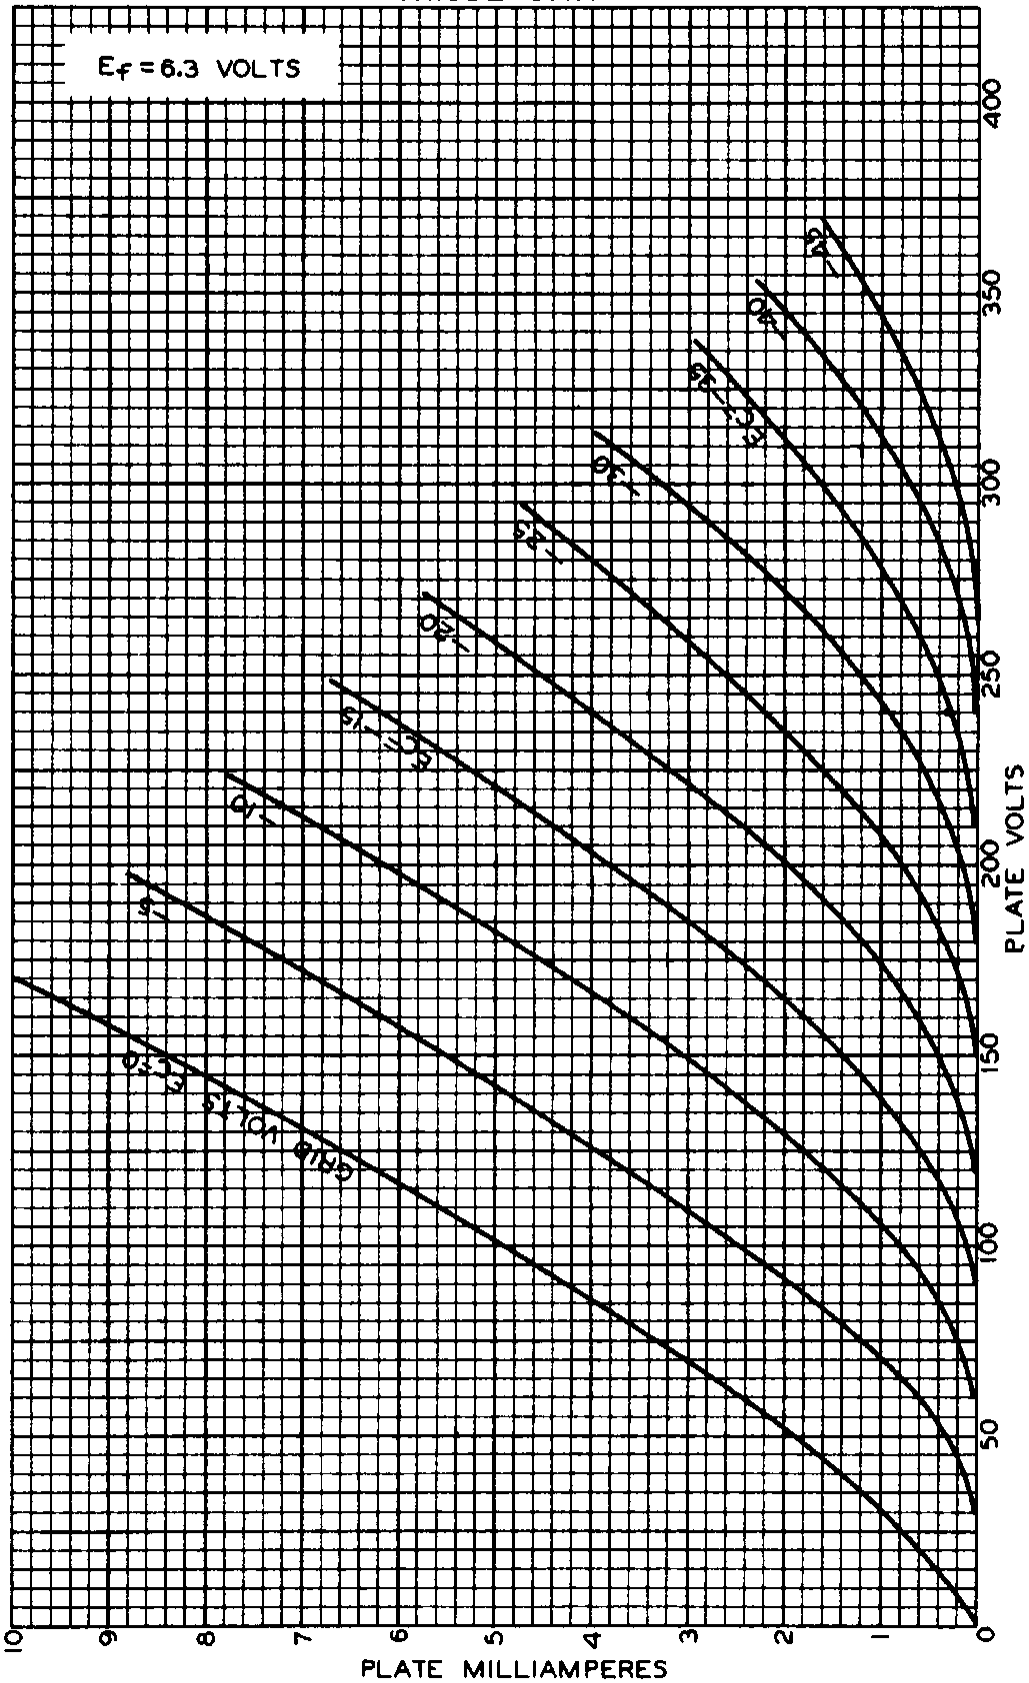

6F7



Radiotron

RCA-6F7

Cunningham
RADIO TUBES

C-6F7

AVERAGE PLATE CHARACTERISTICS
PENTODE UNIT

