


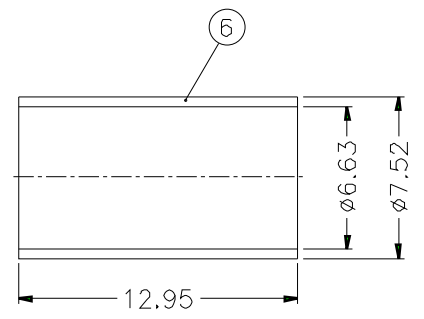


1			2			3			4			5			6			7			8		
REVISIONS																							
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE																					

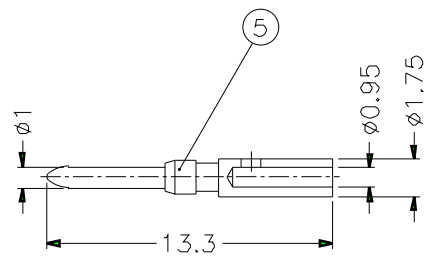

RECOMMENDED
CABLE STRIPPING DIM'S

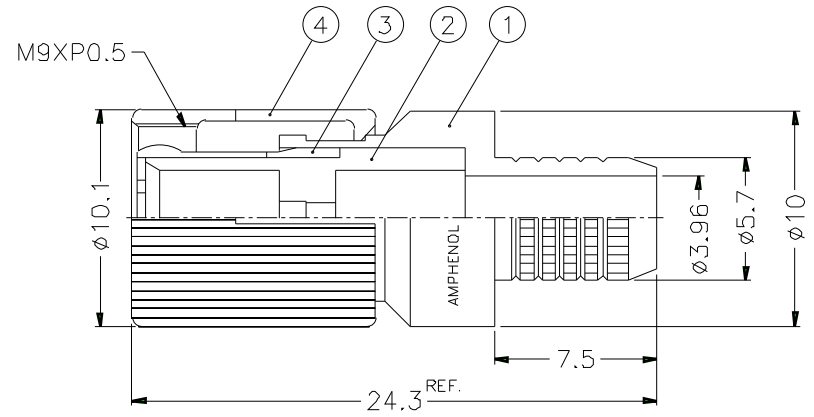

- CABLES: - RG 59 B/U
- KX 6 A
- FERRULE CRIMPING TOOLS P/N
227-944 (M22520/5.01)
227-1221-19A (M22520/5.19) HEX: 6.47 L=10.16
- INNER CONTACT CRIMPING TOOL P/N
413 SP 00 ADJUST TO 6
- CONNECTOR ACCORDING TO NF C 93-570, DIN 47-295, CEI 169-13
- PACKAGING IN BAG WITH COMMERCIAL PART NUMBER AND DATE CODE

					DIMENSIONS ARE IN MILLIMETERS				PART NO. 156 929 05		<h1>Amphenol</h1>			
									APPROVED _____ DATE 10-11-01'					
									CHECKED _____ DATE 10-11-01'		DRAWING NO.			
									DRAWN _____ DATE 10-11-01'		ITEM NO.			
6	FERRULE	COPPER	NICKEL	1					FILE NO.					
5	CONTACT PIN	BRASS	GOLD	1										
4	SHELL	BRASS	NICKEL	1										
3	OUTER CONTACT	BRONZE	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1										
1	BODY	BRASS	NICKEL	1										
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A					