NOTES:

1. MATERIALS AND FINISHES:
   BODY, HEX NUT & BUSHING - BRASS, NICKEL PLATED
   CONTACT - BERYLLIUM COPPER, SILVER PLATED
   INSULATORS - CO-POLYMER OF STYRENE
   GASKET - SILICONE RUBBER, COLOR RED

2. ELECTRICAL:
   A. IMPEDANCE: 50 OHM
   B. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS, MIN.

3. MECHANICAL:
   A. DURABILITY: 500 CYCLES MIN.
   B. TEMPERATURE RANGE: -65°C to +165°C

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	10/5/49	2140	
P	ADDED SHEET 2	2/18/00	43266	CPM
R	BODY AND BUSHING WERE CHANGED	03-Jun-11	48613	SH
T	STAMPING WAS CHANGED\RD-DM1106280ITI	02-Jul-11	48663	SH

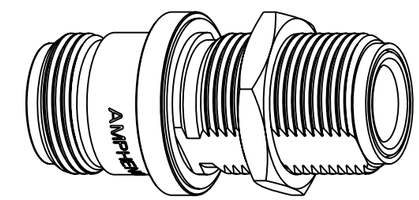

SCALE 1.500

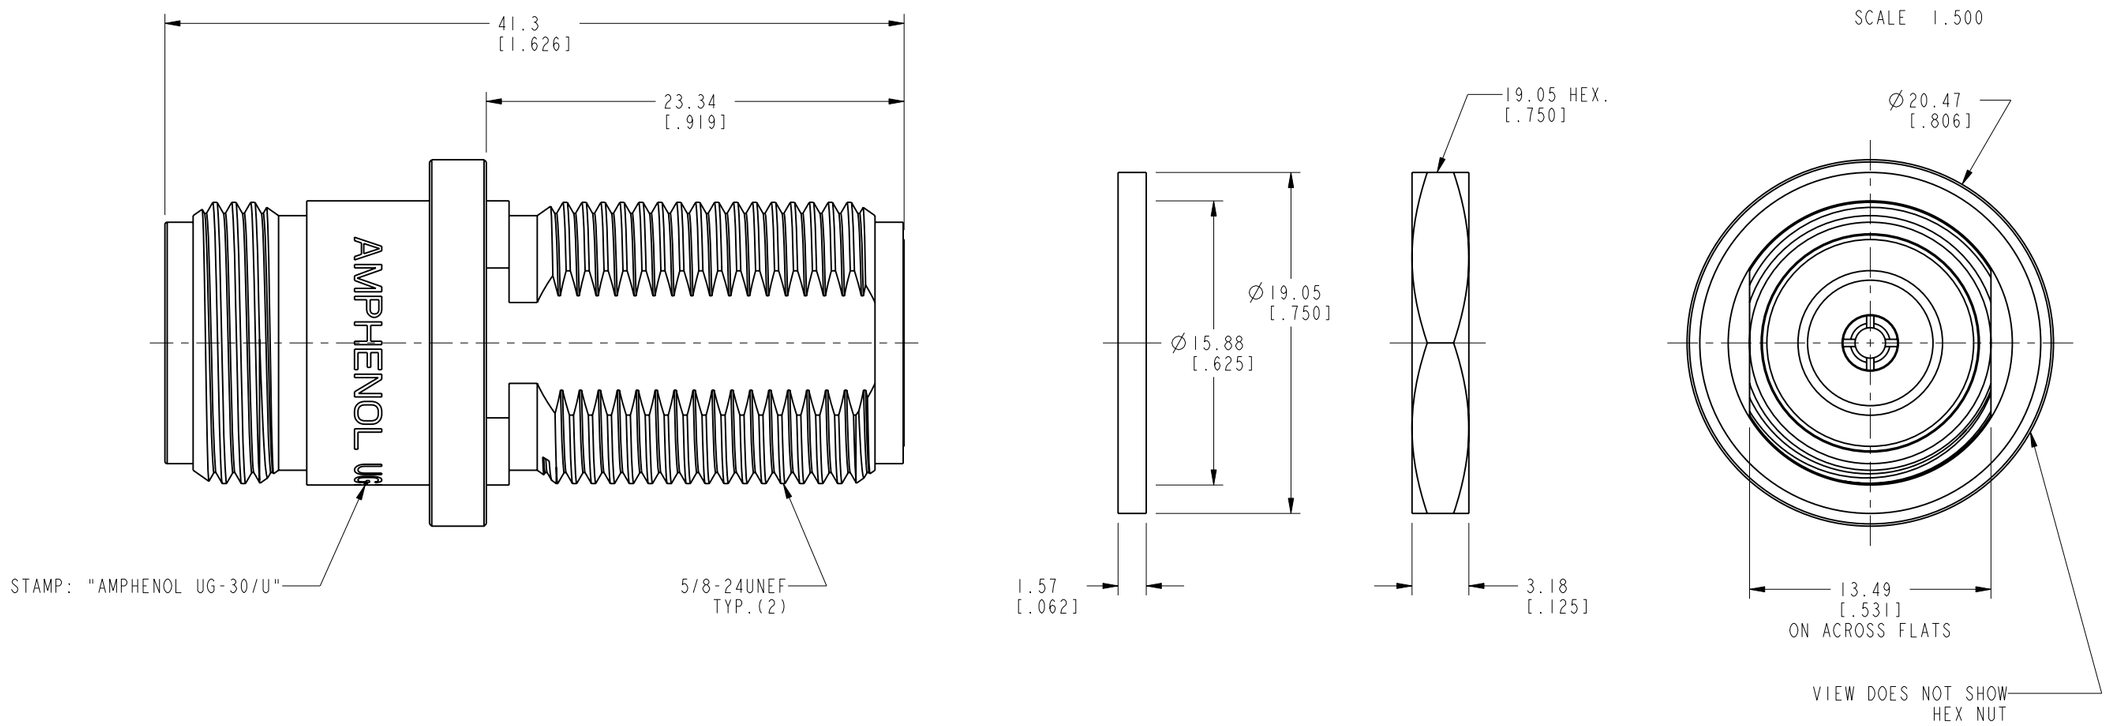

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

<0.5mm	0.5 - 6mm	6 - 30mm	30 - 120mm	ANGLES
± 0.05mm	±0.1mm	±0.2mm	± 0.3mm	±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE
GEN# ASSY3_N

CONFIGURATION LEVEL:

FINISH

DRAWN T.DENG	DATE 01-Jul-11	
ENGINEER D. ROYCE	DATE 10/19/92	
APPROVED S.HSIEH	DATE 02-Jul-11	
CAD FILE		

TITLE
'N' JACK/JACK, ADAPTER WATER TIGHT

SCALE: 3.0:1.0 | SHEET 2 OF 2

DWG SIZE B | REV T

Amphenol RF
www.amphenolrf.com

DRAWING NO. 82-66
ITEM NO. 82-66
PART NO.82-66