


# ACCESSORIES

## REDUCING FERRULE




Reducing ferrule No	Contact size	Wire Gauge	Pin contacts	Socket contacts	Crimping tool	Selector position	Type
900154	8	10	900197/ 900198	900217	809872+809873	6	1
900092	12	16			M22520/1-01+ M22520/1-04	7	2
		18				6	
		20				5	
900093		20				6	2
		22				6	
		24				5	
900091	16	24				4	2
		26				4	
		28				3	
900090	20	26				2	2
		28				2	
900099	22D	30	900004	900044	M22520/2-01 + M22520/2-09 or M22520/2-07	4	2
900094		32				5	2
		34				4	

The sealing of mated connectors is only guaranteed for the minimum wire outside diameter given in the table page 7

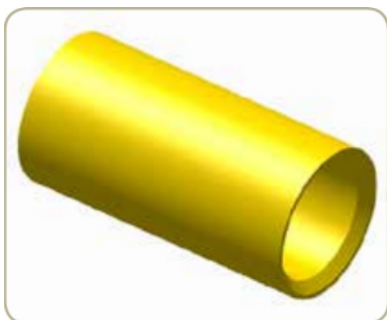

Type 1

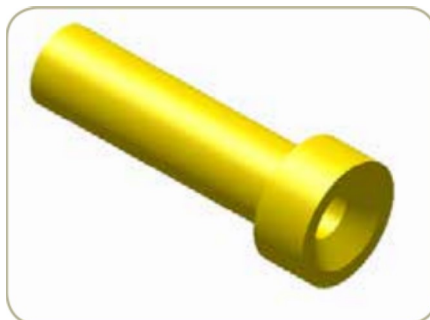

Type 2