

# 5000 series

Miniature toggle switches •  
threaded bushing Ø 6.35 mm or plain bushing



## DISTINCTIVE FEATURES

17 actuators including toggles, paddle levers and locking levers in different lengths.

Various contact materials for low and high currents.

8 functions including maintained and momentary versions.

1 to 4 pole configurations.

12 terminal types including 9 for PC board mounting.

Other types include quick-connect and wire-wrap.

Several bushing styles.

3 types of finish including military black.

3 approvals (UL - CSA - CECC).

4 types of sealing for terminal or front panel requirements.

Numerous accessories available.



# 5000 series

Miniature toggle switches • threaded bushing Ø 6.35 mm or plain bushing



## ELECTRICAL SPECIFICATIONS

- Current/voltage rating with resistive load :

Contact	Maximum	Minimum	Level*
Silver (A)	4 A 30 VDC	50 mA 10 VDC	III and IV
Silver, gold plated (AD)	4 A 30 VDC Gold plating withstands up to 100 mA 30 VDC	10 mA 50 mV 10 µA 5 V	I to IV
Brass, gold plated (CD)	0.4 VA at 20 VAC or DC	10 mA 50 mV 10 µA 5 V	I and II

\*For details, see Technical Information on website.

- For inductive, lamp or capacitive load, consult factory.
- Initial contact resistance : 10 mΩ max.
- Insulation resistance : 1,000 MΩ min. at 500 VDC
- Dielectric strength :  
1,000 Vrms 50 Hz min. between terminals  
1,500 Vrms 50 Hz min. between poles  
1,500 Vrms 50 Hz min. between terminals and frame
- Contact bounce : 2 ms max.
- Electrical life at full load :  
50,000 cycles for single and double pole  
40,000 cycles for 3 pole  
30,000 cycles for 4 pole
- Low level or mechanical life : 100,000 cycles



## GENERAL SPECIFICATIONS

- Torque : 1.25 Nm (.922 Ft.lb) max. applied to nut
- Panel thickness : 2.5 mm (.098) with 2 nuts - 4 mm (.157) with 1 nut
- Operating temperature : -40 °C to +85 °C (-40 °F to +185 °F)

## AGENCY APPROVALS



CECC 96201-007

3 A 250 VAC, 6 A 125 VAC

For VDE, refer to 55000 series.

**NATO**

**Availability** : consult factory for details of approved models.

**Marking** : to order switches marked UL, CSA or CECC, complete appropriate box of ordering format. The preferential list does not appear on the switches.



## MATERIALS


- Case : diallylphthalate (DAP) or high temperature plastic material (UL94-V0)
- Actuator : brass, nickel plated
- Paddles : UL94HB polyamide
- Lever caps : vinyl
- Bushing : brass, nickel plated
- Housing : stainless steel or steel tin plated
- Contacts  
A : silver  
AD : silver, gold plated  
CD : brass, gold plated  
X814 : for peak currents, see "Special options".
- Terminal seal : epoxy

APEM products may be recycled at end-of-life for the re-claiming of valuable metal components.

# 5000 series


Miniature toggle switches • threaded bushing Ø 6.35 mm or plain bushing

## TERMINALS

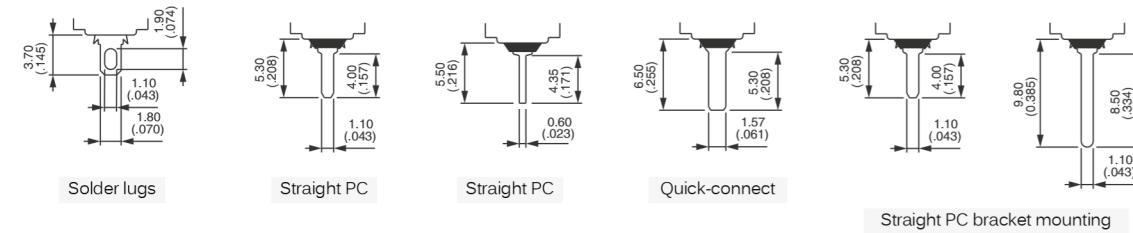


## ELECTRICAL FUNCTION

→ KEYWAY




## PANEL CUT-OUT

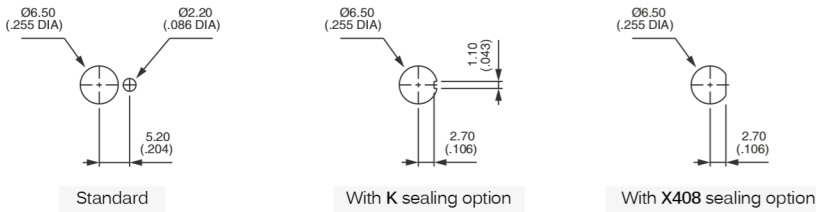


## PCB MOUNTING FOR RIGHT ANGLE TERMINAL MODELS

HORIZONTAL W

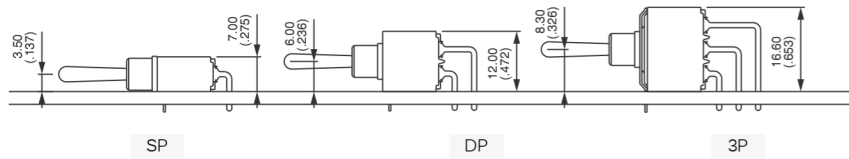

VERTICAL WW

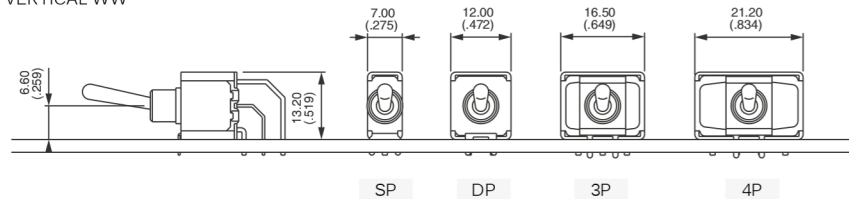

# 5000 series

Miniature toggle switches •  
threaded bushing Ø 6.35 mm or plain bushing



## BUILD YOUR PART NUMBER


**BASIC PART NUMBER**

5																																																					
SERIES		NUMBER OF POLES		TERMINALS		MOMENTARY FOR FUNCTION 4																																															
		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">3</td><td>Single pole</td></tr> <tr><td style="text-align: center;">4</td><td>Double pole</td></tr> <tr><td style="text-align: center;">5</td><td>Three pole</td></tr> <tr><td style="text-align: center;">6</td><td>Four pole</td></tr> </table>	3	Single pole	4	Double pole	5	Three pole	6	Four pole		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">Blank</td><td>Solder lugs or straight PC depending on model</td></tr> <tr><td style="text-align: center;">W</td><td>Right angle, horizontal mounting (5200 - 5400 switches)</td></tr> <tr><td style="text-align: center;">WW</td><td>Right angle, vertical mounting (5200 - 5400 switches)</td></tr> <tr><td style="text-align: center;">Y•</td><td>Bracket mounting (5200 switches)</td></tr> <tr><td style="text-align: center;">Z</td><td>Quick-connect (5200 - 5900 switches)</td></tr> </table>	Blank	Solder lugs or straight PC depending on model	W	Right angle, horizontal mounting (5200 - 5400 switches)	WW	Right angle, vertical mounting (5200 - 5400 switches)	Y•	Bracket mounting (5200 switches)	Z	Quick-connect (5200 - 5900 switches)		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">1R</td><td>ON ON MOM</td></tr> <tr><td style="text-align: center;">2R</td><td>MOM ON MOM</td></tr> </table>	1R	ON ON MOM	2R	MOM ON MOM																									
3	Single pole																																																				
4	Double pole																																																				
5	Three pole																																																				
6	Four pole																																																				
Blank	Solder lugs or straight PC depending on model																																																				
W	Right angle, horizontal mounting (5200 - 5400 switches)																																																				
WW	Right angle, vertical mounting (5200 - 5400 switches)																																																				
Y•	Bracket mounting (5200 switches)																																																				
Z	Quick-connect (5200 - 5900 switches)																																																				
1R	ON ON MOM																																																				
2R	MOM ON MOM																																																				
	TERMINALS AND BUSHINGS		ELECTRICAL FUNCTIONS		CONNECTIONS FOR FUNCTION 4																																																
	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">0</td><td>Straight PC terminals, 5.08 (.200) terminal spacing</td></tr> <tr><td style="text-align: center;">2</td><td>Straight PC terminals, 4.70 (.185) terminal spacing, right angle or quick-connect</td></tr> <tr><td style="text-align: center;">4</td><td>Straight PC terminals, 4 (.157) terminal spacing or right angle terminals</td></tr> <tr><td style="text-align: center;">6</td><td>Solder lug terminals</td></tr> <tr><td style="text-align: center;">7</td><td>Solder lug terminals, with <b>flatted</b> bushing</td></tr> <tr><td style="text-align: center;">9</td><td>Straight PC or quick-connect terminals, with <b>flatted</b> bushing, 4.70 (.185) terminal spacing</td></tr> </table> <p>Bushing Ø 6 (.236) x 0.75 IS also available as standard.</p>	0	Straight PC terminals, 5.08 (.200) terminal spacing	2	Straight PC terminals, 4.70 (.185) terminal spacing, right angle or quick-connect	4	Straight PC terminals, 4 (.157) terminal spacing or right angle terminals	6	Solder lug terminals	7	Solder lug terminals, with <b>flatted</b> bushing	9	Straight PC or quick-connect terminals, with <b>flatted</b> bushing, 4.70 (.185) terminal spacing		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">6</td><td>ON</td><td>-</td><td>ON</td></tr> <tr><td style="text-align: center;">9</td><td>ON</td><td>OFF</td><td>ON</td></tr> <tr><td style="text-align: center;">7</td><td>MOM</td><td>OFF</td><td>MOM</td></tr> <tr><td style="text-align: center;">8</td><td>ON</td><td>OFF</td><td>MOM</td></tr> <tr><td style="text-align: center;">2</td><td>ON</td><td>-</td><td>MOM</td></tr> <tr><td style="text-align: center;">4</td><td>ON</td><td>ON</td><td>ON</td></tr> <tr><td style="text-align: center;">4</td><td>ON</td><td>ON</td><td>MOM ▲</td></tr> <tr><td style="text-align: center;">4</td><td>MOM</td><td>ON</td><td>MOM ▲</td></tr> </table> <p><b>Function 4</b> Must not have blank in «connections» box. ▲ Must not have blank in «momentary» box.</p>	6	ON	-	ON	9	ON	OFF	ON	7	MOM	OFF	MOM	8	ON	OFF	MOM	2	ON	-	MOM	4	ON	ON	ON	4	ON	ON	MOM ▲	4	MOM	ON	MOM ▲		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">TH</td><td>Standard</td></tr> <tr><td style="text-align: center;">CT</td><td>Reversed</td></tr> </table> <p>For functions 4, 4-1R, 4-2R (leave blank for all other functions). Wiring diagrams, see Technical information on website.</p>	TH	Standard	CT	Reversed
0	Straight PC terminals, 5.08 (.200) terminal spacing																																																				
2	Straight PC terminals, 4.70 (.185) terminal spacing, right angle or quick-connect																																																				
4	Straight PC terminals, 4 (.157) terminal spacing or right angle terminals																																																				
6	Solder lug terminals																																																				
7	Solder lug terminals, with <b>flatted</b> bushing																																																				
9	Straight PC or quick-connect terminals, with <b>flatted</b> bushing, 4.70 (.185) terminal spacing																																																				
6	ON	-	ON																																																		
9	ON	OFF	ON																																																		
7	MOM	OFF	MOM																																																		
8	ON	OFF	MOM																																																		
2	ON	-	MOM																																																		
4	ON	ON	ON																																																		
4	ON	ON	MOM ▲																																																		
4	MOM	ON	MOM ▲																																																		
TH	Standard																																																				
CT	Reversed																																																				



# 5000 series

Miniature toggle switches • threaded bushing Ø 6.35 mm or plain bushing

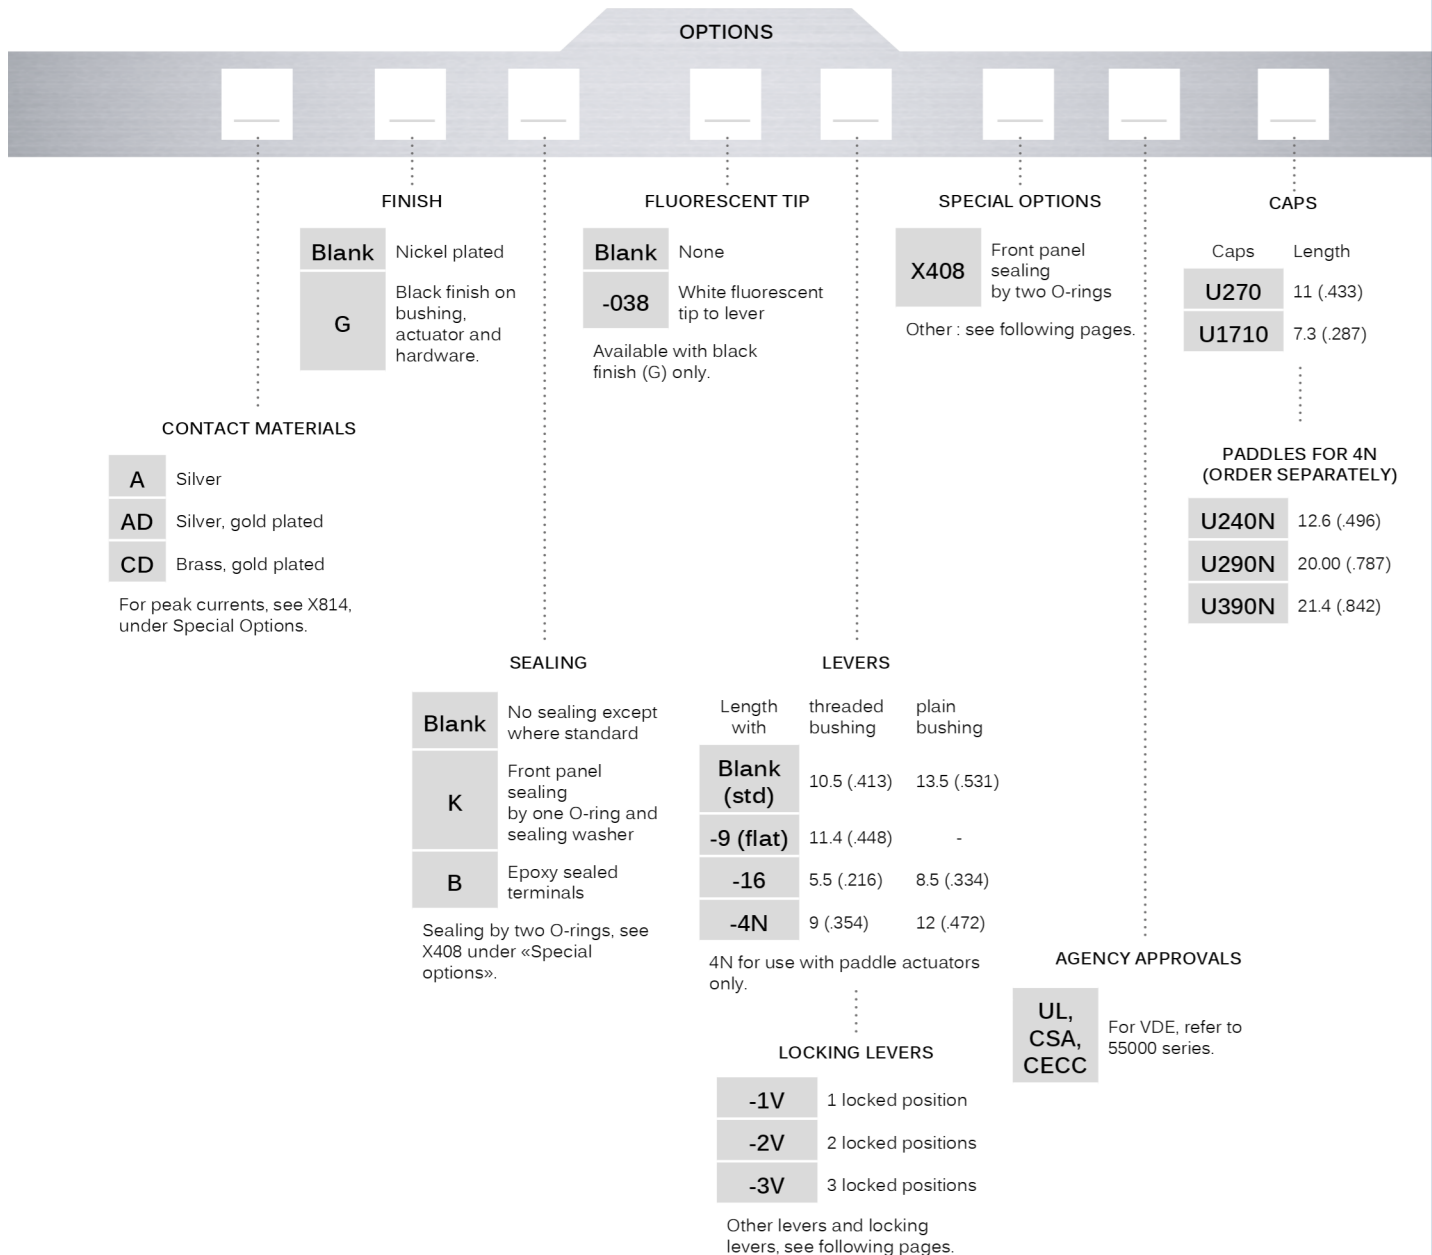

## ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.

- Notice** : please note that not all combinations of above numbers are available. Refer to the following pages for further information.
- Sealing boots** are available. See "Sealing Boots" section of website.
- Mounting accessories** : standard hardware supplied with all models with Ø 6.35 (1/4) or Ø 6 (.236) threaded bushing : 2 hex nuts 8 mm (.314) across flats, 1 locking ring and 1 lockwasher. Standard and special hardware is presented in the "Hardware" section of website.

# 5000 series

Miniature toggle switches • threaded bushing Ø 6.35 mm

## SOLDER LUG TERMINALS SINGLE POLE



5636	III 2-3	II -	I 1-2
5639	ON	OFF	ON
5637	MOM	OFF	MOM
5638	ON	OFF	MOM
5632	ON	-	MOM

## SOLDER LUG TERMINALS DOUBLE POLE



5646	III 2-3 5-6	II -	I 1-2 4-5
5649	ON	OFF	ON
5647	MOM	OFF	MOM
5648	ON	OFF	MOM
5642	ON	-	MOM
5644*	ON	ON	ON
5644 1R*	ON	ON	MOM
5644 2R*	MOM	ON	MOM

## SOLDER LUG TERMINALS THREE POLE



5656	III 2-3 5-6 8-9	II -	I 1-2 4-5 7-8
5659	ON	OFF	ON
5657	MOM	OFF	MOM
5658	ON	OFF	MOM
5652	ON	-	MOM


## SOLDER LUG TERMINALS FOUR POLE




5666	III 2-3 5-6 8-9 11-12	II -	I 1-2 4-5 7-8 10-11
5669	ON	OFF	ON
5667	MOM	OFF	MOM
5668	ON	OFF	MOM
5662	ON	-	MOM
5664*	ON	ON	ON
5664 1R*	ON	ON	MOM
5664 2R*	MOM	ON	MOM

→ KEYWAY

Shown with standard lever

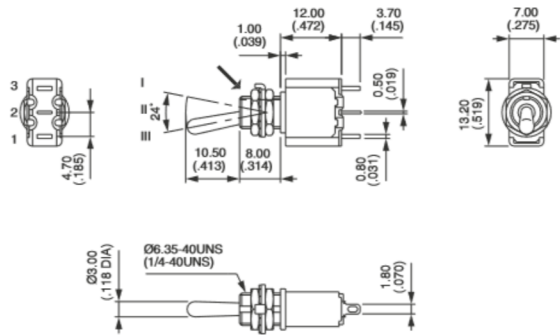


→ KEYWAY

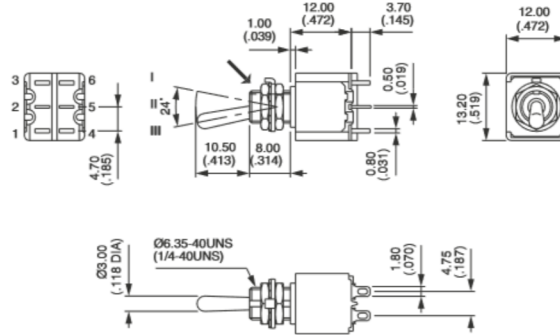


\* Function 4 : SP in DP case - specify CT or TH connections.

→ KEYWAY

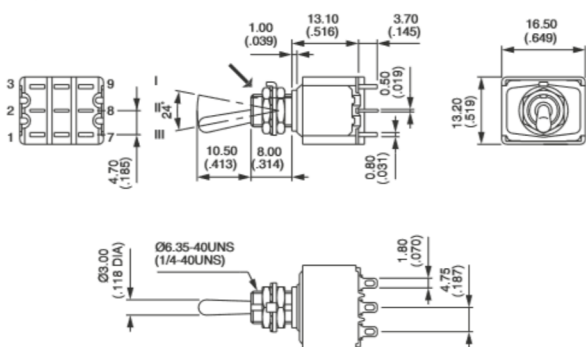

→ KEYWAY

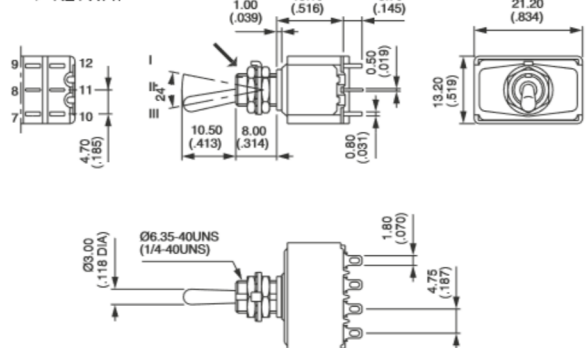

\* Function 4 : DP in 4P case - specify CT or TH connections.

All models above also available with flatted bushing : 5700 or with dia. 6 mm x 0.75 SI (236 x 0.75 IS) : 5500.



# 5000 series

Miniature toggle switches • threaded bushing Ø 6.35 mm or plain bushing

## STRAIGHT PC TERMINALS SPACING 5.08 (.200)



	III	II	I	
Single pole	2-3		1-2	
Double pole	5-6		4-5	
5036 B	5046 B	ON	OFF	ON
5039 B	5049 B	ON	OFF	ON
5037 B	5047 B	MOM	OFF	MOM
5038 B	5048 B	ON	OFF	MOM
5032 B	5042 B	ON	-	MOM
	5044* B	ON	ON	ON
	5044 1R* B	ON	ON	MOM
	5044 2R* B	MOM	ON	MOM

Epoxy sealed terminals standard (B).

## QUICK-CONNECT TERMINALS SINGLE POLE



	III	II	I
	2-3		1-2
5236Z B	ON	-	ON
5239Z B	ON	OFF	ON
5237Z B	MOM	OFF	MOM
5238Z B	ON	OFF	MOM
5232Z B	ON	-	MOM

Single and double pole models also available with flatted bushing : 5900Z.  
Epoxy sealed terminals standard (B).

## QUICK-CONNECT TERMINALS DOUBLE POLE



	III	II	I
	2-3		1-2
	5-6		4-5
5246Z B	ON	-	ON
5249Z B	ON	OFF	ON
5247Z B	MOM	OFF	MOM
5248Z B	ON	OFF	MOM
5242Z B	ON	-	MOM
5244Z* B	ON	ON	ON
5244Z 1R* B	ON	ON	MOM
5244Z 2R* B	MOM	ON	MOM

Epoxy sealed terminals standard (B).


## RIGHT ANGLE TERMINALS - HORIZONTAL SINGLE POLE



	III	II	I
	2-3		1-2
5236W	ON	-	ON
5239W	ON	OFF	ON
5237W	MOM	OFF	MOM
5238W	ON	OFF	MOM
5232W	ON	-	MOM



Also available with terminal spacing 4 mm (.157) instead of 4.7 (.185) : 5400W.

→ KEYWAY


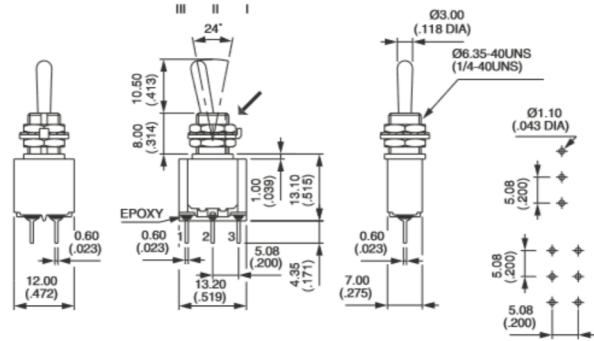


\* Function 4 : SP in DP case - specify CT or TH connections.

→ KEYWAY


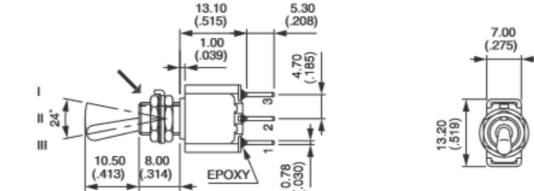


→ KEYWAY

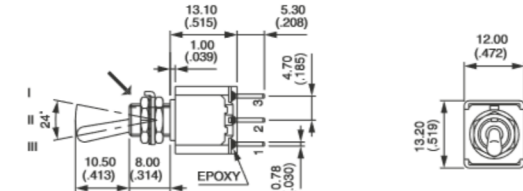

\* Function 4 : SP in DP case - specify CT or TH connections.

→ KEYWAY

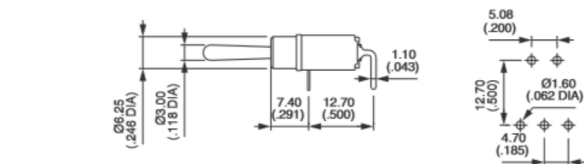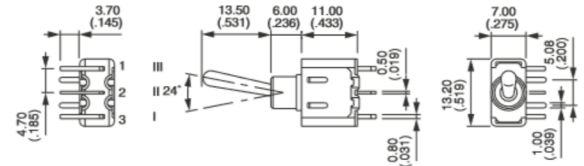

# 5000 series

Miniature toggle switches • plain bushing

## RIGHT ANGLE TERMINALS - HORIZONTAL DOUBLE POLE



	III	II	I
	2-3	-	1-2
	5-6	-	4-5
5246W	ON	-	ON
5249W	ON	OFF	ON
5247W	MOM	OFF	MOM
5248W	ON	OFF	MOM
5242W	ON	-	MOM
5244W*	ON	ON	ON
5244W 1R*	ON	ON	MOM
5244W 2R*	MOM	ON	MOM

Also available with terminal spacing 4 mm (.157) instead of 4.7 (.185) : 5400W.

## RIGHT ANGLE TERMINALS - HORIZONTAL THREE POLE



	III	II	I
	2-3	-	1-2
	5-6	-	4-5
	8-9	-	7-8
5256W	ON	-	ON
5259W	ON	OFF	ON
5257W	MOM	OFF	MOM
5258W	ON	OFF	MOM
5252W	ON	-	MOM

## RIGHT ANGLE TERMINALS - VERTICAL SINGLE POLE



	III	II	I
	2-3	-	1-2
5236WW	ON	-	ON
5239WW	ON	OFF	ON
5237WW	MOM	OFF	MOM
5238WW**	ON	OFF	MOM
5232WW**	ON	-	MOM

## RIGHT ANGLE TERMINALS - VERTICAL DOUBLE POLE




	III	II	I
	2-3	-	1-2
	5-6	-	4-5
5246WW	ON	-	ON
5249WW	ON	OFF	ON
5247WW	MOM	OFF	MOM
5248WW**	ON	OFF	MOM
5242WW**	ON	-	MOM
5244WW*	ON	ON	ON
5244WW 1R*	ON	ON	MOM
5244WW 2R*	MOM	ON	MOM

Vertical right angle models above : \* Function 4 : SP in DP case, DP in 4P case - specify CT or TH connections.




\*\* Functions 2 and 8 : reversed connection available, consult factory.

Also available with pin spacing 2.54 mm (.100) instead of 3.81 mm (.150) : 5400WW

Shown with standard lever

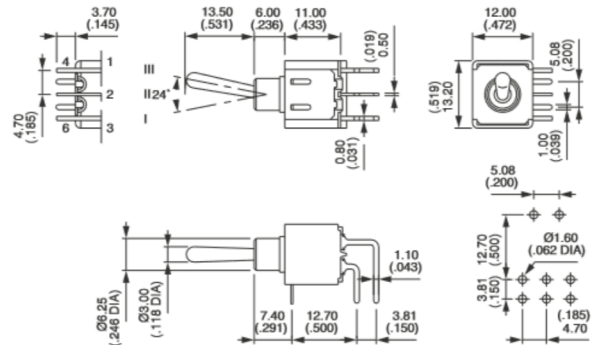

\* Function 4 : SP in DP case - specify CT or TH connections.

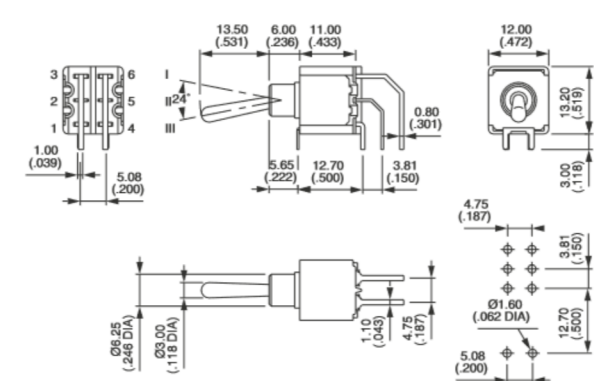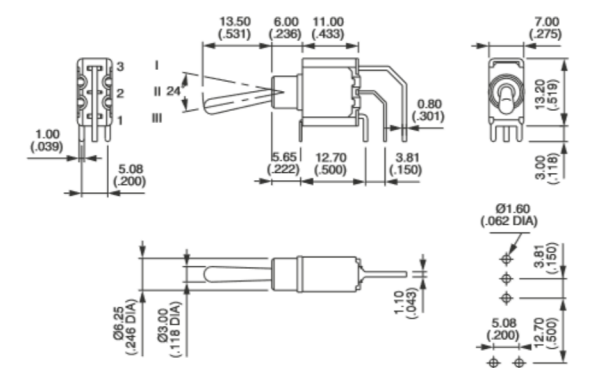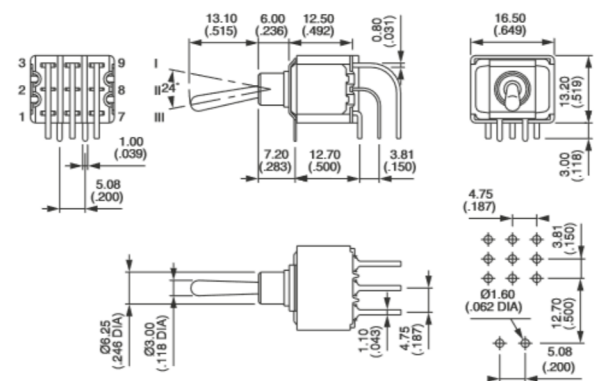



# 5000 series

Miniature toggle switches • plain bushing

## RIGHT ANGLE TERMINALS - VERTICAL THREE POLE



	III	II	I
	2-3		1-2
	5-6		4-5
	8-9		7-8
5256WW	ON	-	ON
5259WW	ON	OFF	ON
5257WW	MOM	OFF	MOM
5258WW**	ON	OFF	MOM
5252WW**	ON	-	MOM

\*\* Functions 2 and 8 : reversed connection available, consult factory.

## RIGHT ANGLE TERMINALS - VERTICAL FOUR POLE



	III	II	I
	2-3		1-2
	5-6		4-5
	8-9		7-8
	11-12		10-11
5266WW	ON	-	ON
5269WW	ON	OFF	ON
5267WW	MOM	OFF	MOM
5268WW**	ON	OFF	MOM
5262WW**	ON	-	MOM
5264WW*	ON	ON	ON
5264WW 1R*	ON	ON	MOM
5264WW 2R*	MOM	ON	MOM

Vertical right angle models above also available with terminal spacing 2.54 mm (.100) instead of 3.81 mm (.150) : 5400WW.

## SHORT BRACKET - WIDTH 15.75 (.620) SINGLE POLE



	III	II	I
	2-3		1-2
5236Y B	ON	-	ON
5239Y B	ON	OFF	ON
5237Y B	MOM	OFF	MOM
5238Y B	ON	OFF	MOM
5232Y B	ON	-	MOM

Epoxy sealed terminals standard (B).



## SHORT BRACKET - WIDTH 15.75 (.620) DOUBLE POLE





	III	II	I
	2-3		1-2
	5-6		4-5
5246Y B	ON	-	ON
5249Y B	ON	OFF	ON
5247Y B	MOM	OFF	MOM
5248Y B	ON	OFF	MOM
5242Y B	ON	-	MOM
5244Y B*	ON	ON	ON
5244Y 1R B*	ON	ON	MOM
5244Y 2R B*	MOM	ON	MOM

Epoxy sealed terminals standard (B).

Shown with standard lever

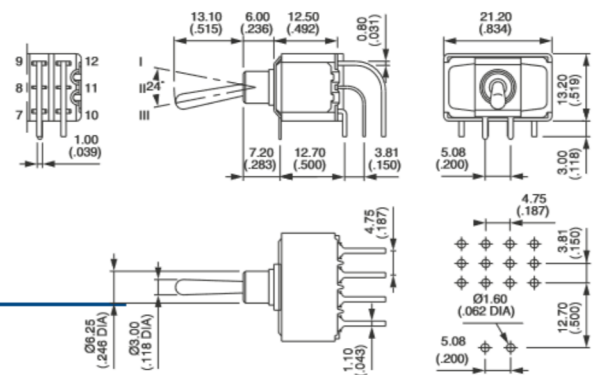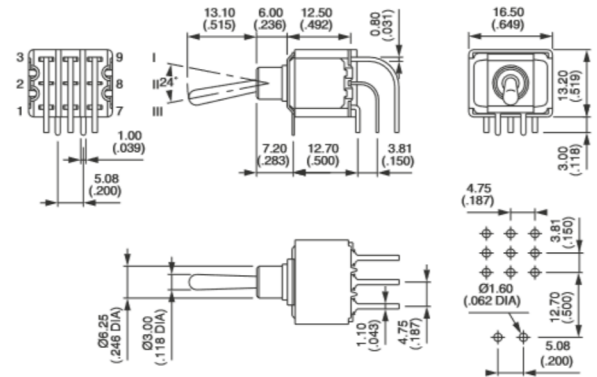

\* Function 4 : SP in DP case, DP in 4P case - specify CT or TH connections.

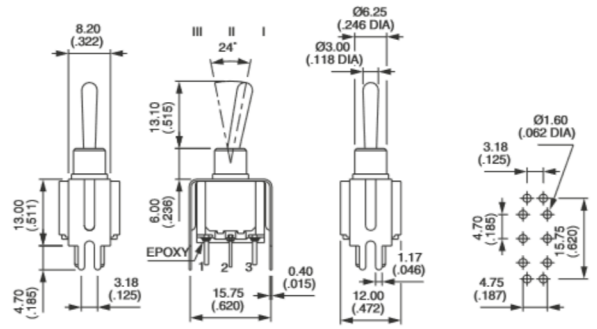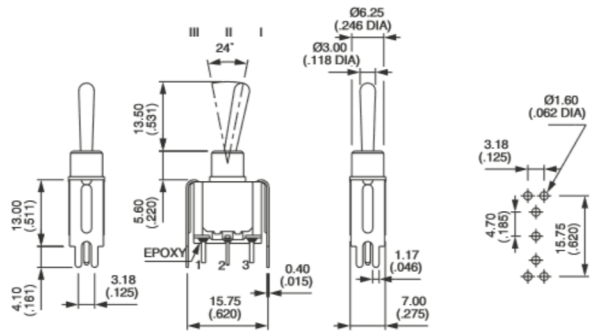

\*Function 4 : SP in DP case - specify CT or TH connections.


# 5000 series

Miniature toggle switches • plain bushing

## TALL BRACKET - WIDTH 15.75 (.620)




	Single pole	Double pole	III 2-3 5-6	II -	I 1-2 4-5
5236Y4 B	5246Y4 B	ON	-	ON	
5239Y4 B	5249Y4 B	ON	OFF	ON	
5237Y4 B	5247Y4 B	MOM	OFF	MOM	
5238Y4 B	5248Y4 B	ON	OFF	MOM	
5232Y4 B	5242Y4 B	ON	-	MOM	
	5244Y4 B*	ON	ON	ON	
	5244Y4 1R B*	ON	ON	MOM	
	5244Y4 2R B*	MOM	ON	MOM	

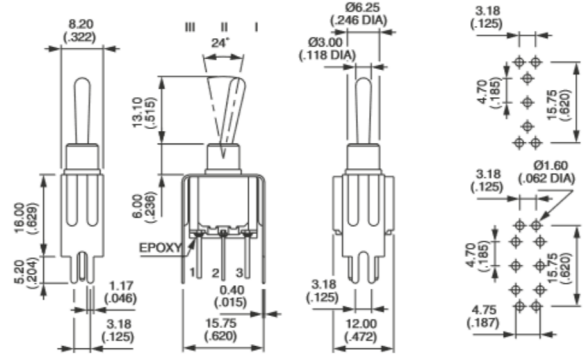

## SHORT BRACKET - WIDTH 19.05 (.750)




	Single pole	Double pole	III 2-3 5-6	II -	I 1-2 4-5
5236Y6 B	5246Y6 B	ON	-	ON	
5239Y6 B	5249Y6 B	ON	OFF	ON	
5237Y6 B	5247Y6 B	MOM	OFF	MOM	
5238Y6 B	5248Y6 B	ON	OFF	MOM	
5232Y6 B	5242Y6 B	ON	-	MOM	
	5244Y6 B*	ON	ON	ON	
	5244Y6 1R B*	ON	ON	MOM	
	5244Y6 2R B*	MOM	ON	MOM	

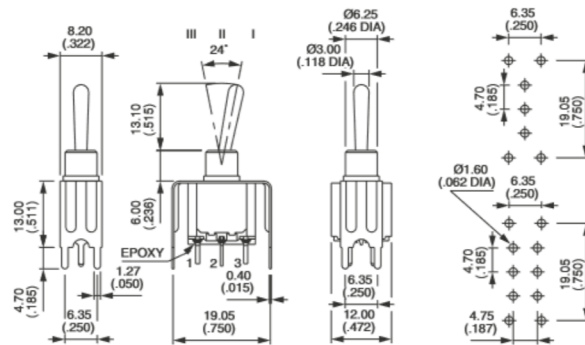

## TALL BRACKET - WIDTH 19.05 (.750)



	Single pole	Double pole	III 2-3 5-6	II -	I 1-2 4-5
5236Y7 B	5246Y7 B	ON	-	ON	
5239Y7 B	5249Y7 B	ON	OFF	ON	
5237Y7 B	5247Y7 B	MOM	OFF	MOM	
5238Y7 B	5248Y7 B	ON	OFF	MOM	
5232Y7 B	5242Y7 B	ON	-	MOM	
	5244Y7 B*	ON	ON	ON	
	5244Y7 1R B*	ON	ON	MOM	
	5244Y7 2R B*	MOM	ON	MOM	

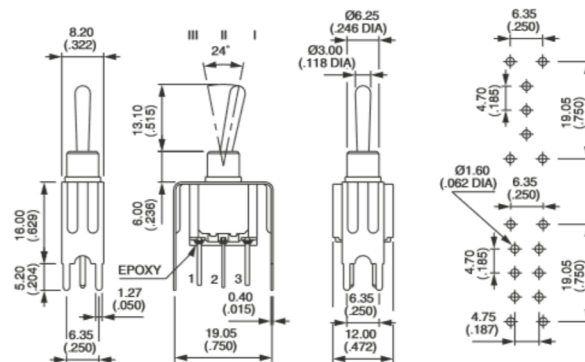


Epoxy sealed terminals standard (B).  
\* Function 4 : SP in DP case - specify CT or TH connections.

# 5000 series


Miniature toggle switches • threaded bushing Ø 6.35 mm or plain bushing

## CONTACT MATERIALS




- A Silver
  - AD Silver, gold plated
  - CD Brass, gold plated
- Special contacts for peak currents : see X814, under "Special Options".

## FINISH




- Blank Nickel plated
- G Black finish on bushing, actuator and hardware

## SEALING




- Blank
  - For 5000 and 5200Z models : epoxy sealed terminals standard
  - Other models : no sealing required
- K Front panel sealing by one O-ring and sealing washer. Protects the switch against water and dust. Panel seal withstands 1 bar pressure and remains sealed even when switch is operated.
  - ⚠ Available on models with Ø 6.35 (1/4) threaded bushing only.
  - Not available with levers 8, 9, 12, 22, 23.
- B Epoxy sealed terminals
- KB Combined sealings

### OPTION B



### OPTION K

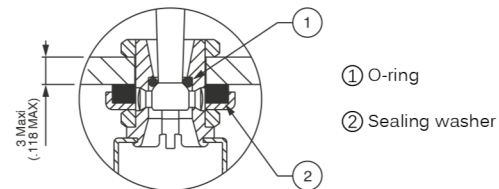

Sealing by two O-rings, see X408 under "Special options".



K with Ø 6.35 (1/4) keyway bushing includes washer U360



K with Ø 6.35 (1/4) flatted bushing includes washer U5141

## FLUORESCENT TIP



- Blank None
- 038 White fluorescent tip. Becomes luminous when submitted to ultraviolet rays.
  - ⚠ Available with black finish (option G) only.
  - Consult factory for levers available with this option.



-19 Standard lever



Locking lever

Same dimensions as standard actuator on next page.



# 5000 series


Miniature toggle switches • threaded bushing Ø 6.35 mm or plain bushing

## ACTUATORS

BASIC P/N

Dash compulsory before lever code.


LEVERS FOR THREADED BUSHING MODELS Ø 6,35 (1/4) OR Ø 6 (.236)

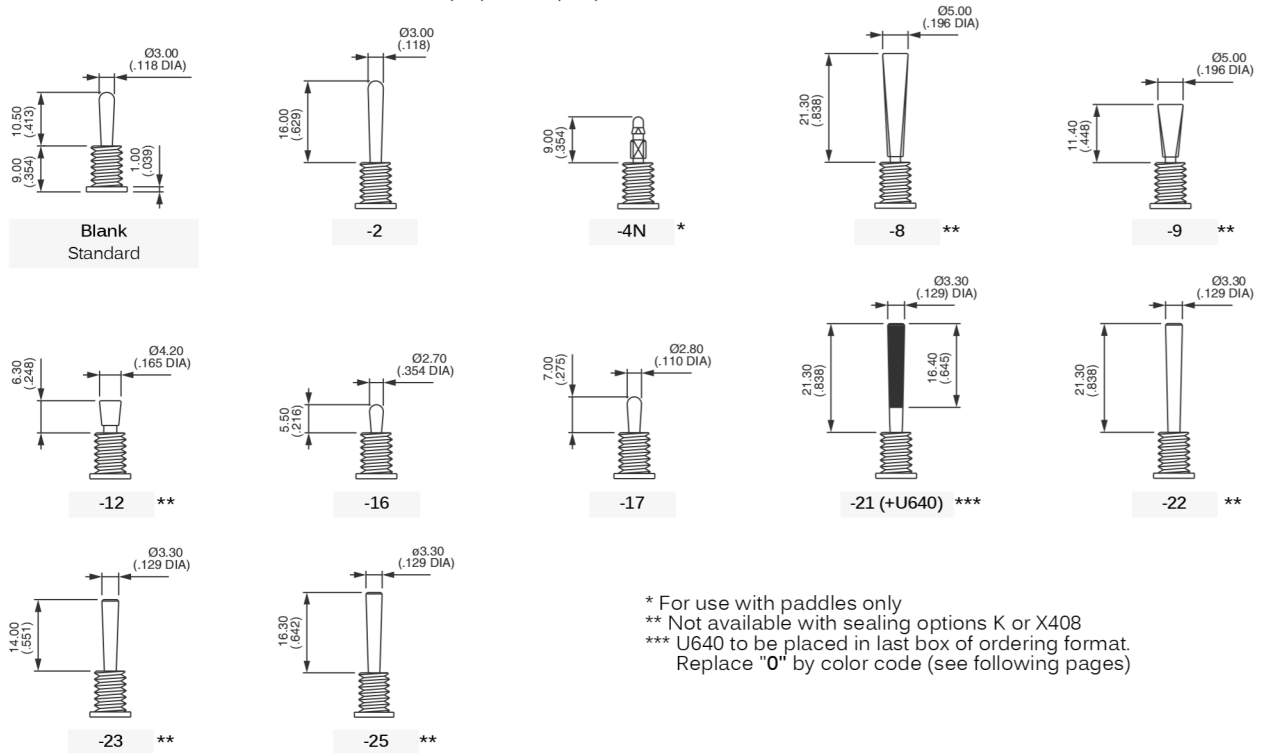

LOCKING LEVERS FOR THREADED BUSHING MODELS Ø 6,35 (1/4)

- 1V 1 locked position (function 6)
- 2V 2 locked positions (function 6)
- 3V 3 locked positions (functions 9 and 4)

→ KEYWAY

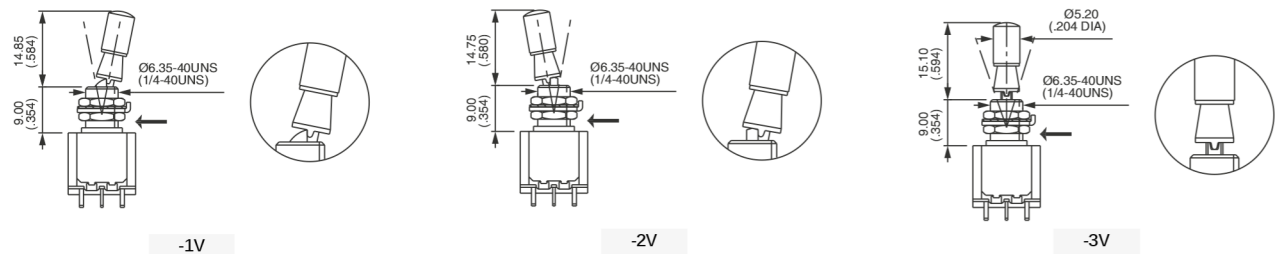


Consult factory for other locking lever options.

For plain bushing models, see X386 or X916 under "Special options" on the following pages.

# 5000 series


Miniature toggle switches •  
threaded bushing Ø 6.35 mm or plain bushing

## ACTUATORS (CONTINUED)




LEVERS FOR PLAIN BUSHING MODELS : W - WW AND Y


Lever length : With bracket or mounting plate lever length will be reduced by 0.4 mm (.015) as a rule. Please refer to switch technical drawings of basic models pages for details.




Blank  
Standard




-2




-4N




-7



-16




-17



-21 (+U640) \*

\* U640 to be placed in last box of ordering format.  
For actuator colors, replace «0» by color code (see following pages)

## SPECIAL OPTIONS



**Blank** No special requirement


**X408** Front panel sealing by two O-rings. Flatted bushing for precise orientation. Protects the switch against water and dust. Panel seal withstands 1 bar pressure and remains sealed even when switch is operated. Includes sealed terminals (option B).

⚠ Available only on models with threaded bushing.  
Not available with levers 8, 9, 12, 22, 23.


**X371** Plain bushing Ø 6.25 mm (.246) (instead of standard threaded bushing).

**X372** Threaded bushing Ø 6.35 (1/4). **Height 7 mm (.274).**


**X386** Threaded bushing Ø 6.35 mm (1/4) to replace plain bushing on models W - WW and Y.




X408



X371



X372




X386


# 5000 series

Miniature toggle switches • threaded bushing Ø 6.35 mm or plain bushing


## SPECIAL OPTIONS (CONTINUED)




- X442** Threaded bushing Ø 6.35 mm (1/4) - Height 9.9 mm (.389).
- X445** Plain bushing. Height 7.2 mm (.283) - for W, WW and Y models.  
Available with the same levers, insulating cap and paddles as X404.
- X601** **Silver plated brass contacts.**  
Current/voltage rating for an electrical life of 20,000 cycles : 0.5 A 30 VDC. Minimum quantity : 5,000 pieces per model and shipment.
- X681** **Satin chrome** actuator
- X814** **Switches for peak currents** - single and double pole.  
On request.
- X902** Plain bushing Ø 6.25 mm (.246) - Height 9 mm (.354) (not available with K sealing option).
- X916** Locking lever on model with plain bushing.
- X404** **Horizontal right angle (W)** with reduced overall dimensions (shown with lever -16)



X442




X445




X916

ⓘ With options X372, X386, X442 and X445, the lever lengths indicated on previous pages will be modified.

### OPTION X404




Standard W



Option X404



Single pole	Double pole	III	II	I
5236W X404	5246W X404	2-3	-	1-2
5239W X404	5249W X404	5-6	-	4-5
5237W X404	5247W X404	MOM	OFF	MOM
5238W X404	5248W X404	ON	OFF	MOM
5232W X404	5242W X404	ON	-	MOM
	5244W X404*	ON	ON	ON
	5244W 1R X404*	ON	ON	MOM
	5244W 2R X404*	MOM	ON	MOM

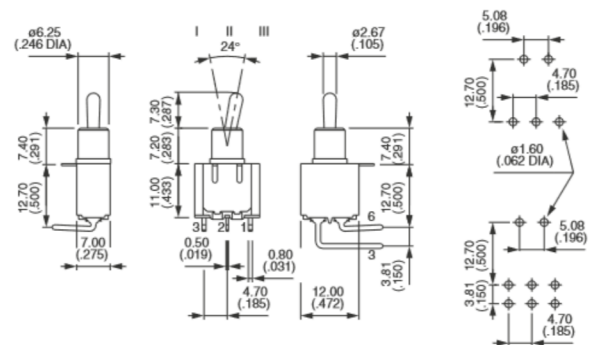

\* Function 4 : SP in DP case - specify CT or TH connections

# 5000 series


Miniature toggle switches •  
threaded bushing Ø 6.35 mm or plain bushing

**SPECIAL OPTIONS**  
(CONTINUED)


BASIC P/N

**OPTION X404 (CONTINUED)**


LEVERS LENGTHS FOR X404 (ALSO AVAILABLE WITH X445 OPTION)




-13




-2




-4N \*




-8 \*\*




-9 \*\*




-12 \*\*




-16




-17



-21 (+U640) \*\*\*



-22



-23

\* For paddles

\*\* Levers -8, -9 and -12 not available with function 2 (ON-MOM)

\*\*\* U640 to be placed in last box of ordering format. Replace "0" with color code.

**Insulating caps and paddles for X404 :**

Insulating cap U1710 available with lever style 16.

Paddles U240N, U290N and U390N available with lever style 4N. See details on next page..

**AGENCY APPROVALS**

BASIC P/N

**Blank** No agency approval required.

**UL** All standard models

**CSA**

**CECC** Standard models 5600 - 5200

**Availability :** consult factory for details of approved combinations or options.

**Marking :** to order switches marked UL, CSA or CECC, complete above box with desired approvals, in this order & without space (ex. : ULCSACECC). **VDE (with UL & CSA) :** Refer to 55000 series.

**Preferential lists :** see specifications.


# 5000 series

Miniature toggle switches • threaded bushing Ø 6.35 mm or plain bushing


## INSULATING CAPS

BASIC P/N


- U270** For standard lever & threaded bushing only
- U1040** For standard lever & plain bushing only
- U1710** For lever 17 and threaded bushing  
For lever 7 and plain bushing



U270



U1040




U1710

For cap colors, replace "0" with number :


- 1 Blue
- 1/4 Dark blue
- 2 Black
- 3 Green
- 4 Grey
- 5 Yellow
- 6 Red
- 7/1 White
- 9 Orange

## PADDLES


For use with lever 4N only. Shown with standard threaded bushing. Order separately.



U240N



U290N

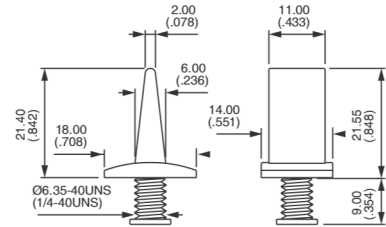

U390N

For cap colors, replace "0" with number :

- 1 Blue
- 1/4 Dark blue
- 2 Black
- 3 Green
- 4 Grey
- 5 Yellow
- 6 Red
- 7 Ivory
- 7/1 White
- 9 Orange