



High vacuum FULL WAVE RECTIFYING VALVE for use in car radio receivers
TUBE REDRESSEUR BIPLAQUE à vide poussé pour postes auto-radio
Hochvakuum VOLLWEGGLEICHRICHTERRÖHRE für Autoempfänger

Heating: indirect by A.C.
parallel supply
Chauffage: indirect par C.A.
alimentation en parallèle
Heizung: indirekt durch Wechselstrom; Parallelspeisung

$V_f = 6,3$ V
 $I_f = 0,4$ A


Dimensions in mm
Dimensions en mm
Abmessungen in mm



Operating characteristics and limiting values
Caractéristiques d'utilisation et caractéristiques limites
Betriebs- und Grenzdaten

$V_{tr} = \text{max. } 2 \times 250$ V_{eff}
 $I_o = \text{max. } 60$ mA
 $V_{fk} = \text{max. } 350$ V

$C_{filt} =$ 8 16 32 μ F
 $R_t =$ min. 2x150 2x250 2x300 Ω

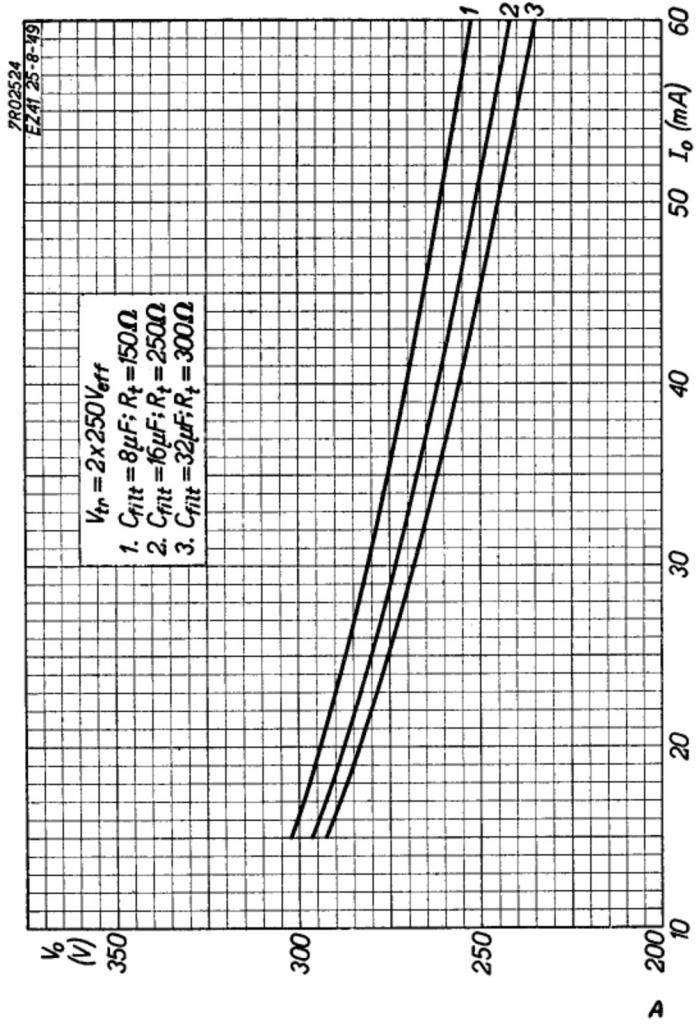



page	EZ41 sheet	date
1	1	1949.09.09
2	A	1949.09.09
3	FP	1999.07.10