


|          |        |           |
|----------|--------|-----------|
| DASH NO. | M CODE | MADE FROM |
|----------|--------|-----------|

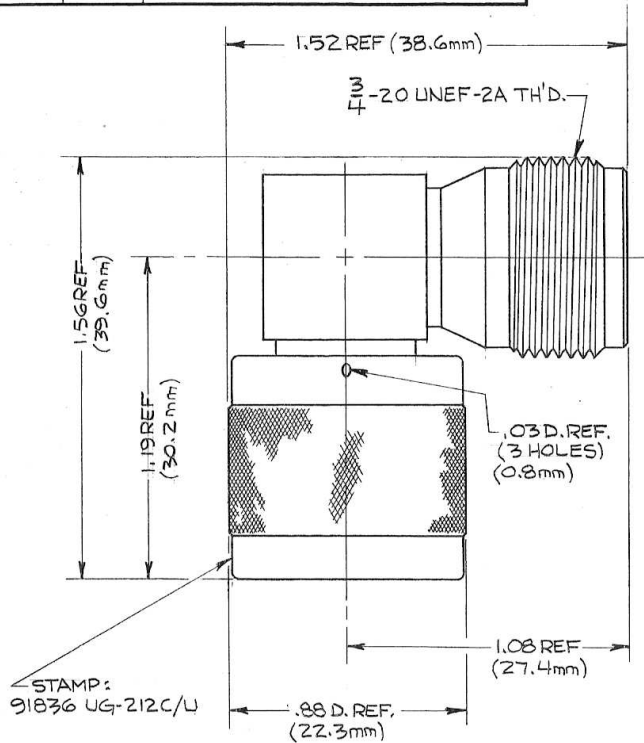

NOTES:

- MATERIALS: INSULATORS - TEFLON, L-P-403, GASKET - SILICONE RUBBER, ZZ-R-765, C-RING - PHOSPHOR BRONZE, QQ-B-750, CENTER CONTACT F } BERYLLIUM COPPER, OUTER CONTACT } QQ-C-530, ANGLE CONTACT M & ALL OTHER PARTS - BRASS, QQ-B-626
- FINISH: ALL METAL PARTS - SILVER PLATE PER QQ-S-365
- ELECTRICAL CHARACTERISTICS: NOMINAL IMPEDANCE - 50Ω, FREQUENCY RANGE - 0 TO 4 GHz, WORKING VOLTAGE - 1500 VOLTS RMS.

GSD

UG-212C/U

| REVISIONS  |                                       |
|--|---------------------------------------|
| ISSUE  | CHANGES                               |
| 10   | CN 23244 E<br>REDRAWN<br>GG 19 APR 82 |
| SCALE NONE   |                                       |
| APPROX SURFACE AREA _____                                |                                       |
| KH-98-01   |                                       |
| USED ON _____  |                                       |
| REF REB 49254<br>MIL-C-3643/4                            |                                       |
| HN ANGLE<br>ADAPTER M-F                                  |                                       |
| DRAWN CHC  | DATE 20 AUG 86                        |
| APPR MJB   | DATE 21 AUG 86                        |
| APPR _____   | DATE _____                            |
| <br>ELECTRONICS CO., INC.<br>150 PARKWAY, NEW YORK 10007 |                                       |
| UG-212C/U  |                                       |

UNLESS OTHERWISE SPECIFIED:

- TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010, 3 PLACE DECIMALS ± .004, T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.
- REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
- NO FILLETS PERMITTED.
- SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
- ALL DIMENSIONS PRIOR TO PLATING.
- ALL PLATING IN ACCORDANCE WITH KER 10004.

GSD