

Molded Metal Film High Stability (< 0.25 % after 1000 h) High Temperature (up to 175 °C) Precision Resistors



The performance of the RCMT resistors exceed the requirements of NF C 83-230 standards. They are particularly relevant to the more stringent military and industrial applications especially when high ambient temperatures such as + 175 °C are to be encountered.

The RCMT resistors are qualified and released to the NF C UTE 83-230 standard styles RS56C, RS60E and C, RS65E and C, RS70E and C.


FEATURES

- 0.1 W to 2 W at 125 °C
- EN 140-100
- CECC 40 101-044
- High climatic performance - 65 °C/+ 175 °C/56 days
- High long term stability drift < 0.25 % after 1000 h
- Tight temperature coefficient to ± 15 ppm/°C
- Temperature coefficient tracking 5 ppm/°C
- Wide ohmic range from 1 Ω to 5 M Ω
- Tight tolerances up to ± 0.1 %
- Matching tolerance to 0.05 %
- Termination: Pure Matt Tin



RoHS
COMPLIANT

DIMENSIONS in millimeters

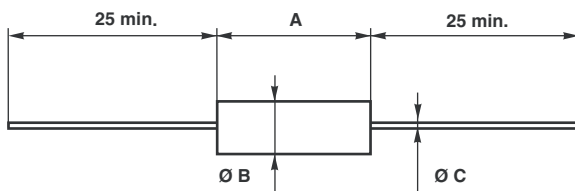

DIMENSIONS	SERIES						
	RCMT 01	RCMT 02	RCMT 05	RCMT 08	RCMT 1	RCMT 2	RCMT 4
A max.	4.32	6.7	10.4	16.5	19.3	29	54
Ø B max.	2.03	2.5	3.66	6.4	6.4	10.2	10.2
Ø C	0.4	0.6	0.6	0.8	0.8	0.8	0.8
Unit weight in g	0.11	0.28	0.46	1.3	1.5	4.4	13

TEMPERATURE COEFFICIENT

TCR CODE	TEMPERATURE RANGE	NOMINAL TEMPERATURE COEFFICIENT	TEMPERATURE RANGE	TYPICAL TEMPERATURE COEFFICIENT
K5	0 °C + 155 °C	± 15 ppm/°C	0 °C + 70 °C	± 10 ppm/°C
K4	- 55 °C + 175 °C	± 25 ppm/°C	- 10 °C + 70 °C	± 15 ppm/°C
K3	- 55 °C + 175 °C	± 50 ppm/°C	- 10 °C + 70 °C	± 30 ppm/°C

ENVIRONMENTAL SPECIFICATIONS

Insulation Resistance > 10⁷ M Ω
 Voltage Coefficient 10 ppm/V
 Environmental Specifications - 65 °C/+ 175 °C/56 days

PRACTICAL OPERATING TOLERANCES

After the 10 000 h load life test, at nominal power rating, 90°/30° cycles, + 125 °C ambient temperature, the total actual drifts measured at + 125 °C are the following:

Manufacturing tolerance	± 0.1 %	± 1 %
Drift due to TCR (K4) + life drift	± 0.25 %	± 0.35 %
Max. total deviation from nominal ohmic value, including the manufacturing tolerance	± 0.35 %	± 1.35 %




TECHNICAL SPECIFICATIONS


VISHAY SFERNICE SERIES	NF C 83-230 CECC 40 101-044	POWER RATING AT + 70 °C	POWER RATING AT + 125 °C	RESISTANCE VALUE RANGE IN RELATION TO - TEMPERATURE COEFFICIENT - TOLERANCE						MAXIMUM VOLTAGE	CRITICAL RESISTANCE
				K3		K4		K5			
				± 0.2 %	± 0.5 % ± 1 %	± 0.1 % ± 0.2 %	± 0.5 % ± 1 %	± 0.1 % ± 0.2 %	± 0.5 % ± 1 %		
RCMT 01 K3	-	0.063 W	0.05 W	10 Ω	1 Ω	49.9 Ω	49.9 Ω	100 Ω	100 Ω	200 V	-
RCMT 01 K4	-			511 kΩ	511 kΩ	100 kΩ	511 kΩ	100 kΩ	100 kΩ		
RCMT 02 K3	RS 56C	0.125 W	0.1 W	10 Ω	1 Ω	10 Ω	1 Ω	10 Ω	10 Ω	300 V	-
RCMT 02 K4	RS 56E			332 kΩ	332 kΩ	332 kΩ	332 kΩ	100 kΩ	332 kΩ		
RCMT 05 K3	RS 60C	0.25 W	0.125 W	10 Ω	1 Ω	10 Ω	1 Ω	10 Ω	10Ω	350 V	980 kΩ
RCMT 05 K4	RS 60E			332 kΩ	1 MΩ	332 kΩ	1 MΩ	332 kΩ	1 MΩ		
RCMT 08 K3	RS 65C	0.5 W	0.25 W	10 Ω	1 Ω	10 Ω	1 Ω	10 Ω	10 Ω	400 V	640 kΩ
RCMT 08 K4	RS 65E			1 MΩ	1.5 MΩ	1 MΩ	1.5 MΩ	750 kΩ	1.5 MΩ		
RCMT 1 K3	RS 70C	1 W	0.5 W	10 Ω	1 Ω	10 Ω	1 Ω	10 Ω	10 Ω	500 V	500 kΩ
RCMT 1 K4	RS 70E			1 MΩ	2 MΩ	1 MΩ	2 MΩ	750 kΩ	2 MΩ		
RCMT 2 K3	-	2 W	1 W	10 Ω	1Ω	10 Ω	1 Ω	10 Ω	10Ω	600 V	360 kΩ
RCMT 2 K4	-			1 MΩ	2.5 MΩ	1 MΩ	2.5 MΩ	1 MΩ	2.5 MΩ		
RCMT 4 K3	-	4 W	2 W	10 Ω	1 Ω	10 Ω	1 Ω	10 Ω	10 Ω	800 V	320 kΩ
RCMT 04 K4	-			2.5 MΩ	5 MΩ	2.5 MΩ	5 MΩ	2 MΩ	2.5 MΩ		

Undergoes European Quality Insurance System (CECC)

POWER RATING CHART

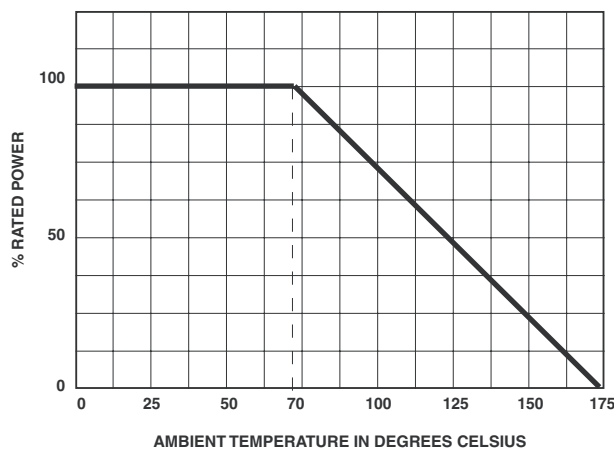

TEMPERATURE RISE

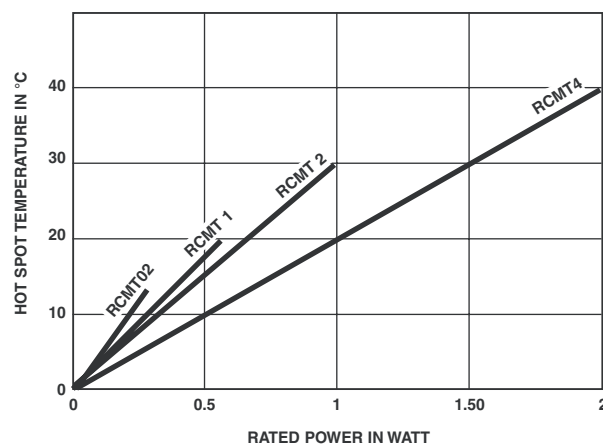

PERFORMANCE			
EN 140-100 - CECC 40 101-044			TYPICAL VALUES AND DRIFTS
TESTS	CONDITIONS	REQUIREMENTS	
Dielectric Voltage	2 Un/1 mn	± 0.25 %	< ± 0.05 % or 0.05 Ω
Short Time Overload	2.5 Um/5 s limited to 2 Un	± 0.25 %	± 0.05 % or 0.05 Ω
Load Life at maximum Category Temperature	1000 h at + 155 °C 0 % of Pr	± 0.5 %	± 0.25 % or 0.05 Ω
Damp Heat Humidity (Steady State)	56 days with low load	± 0.5 %	± 0.2 % or 0.05 Ω Insulation resist. > 10 ⁶ MΩ
Rapid Temperature Change	- 55 °C + 175 °C	± 0.1 %	± 0.05 % or 0.05 Ω
Climatic Sequence	- 65 °C + 175 °C severity 1	± 0.5 % Insulation resist. > 10 ³ MΩ	± 0.2 % or 0.05 Ω Insulation resist. > 10 ⁶ MΩ
Terminal Strength	Pull - Twist - 2 bends	± 0.1 %	± 0.05 % or 0.05 Ω
Vibration	Severity 55 B	± 0.1 %	± 0.05 % or 0.05 Ω
Soldering (Thermal Shock)	+ 260 °C 10 s	± 0.1 %	± 0.05 % or 0.05 Ω
Load Life	cycle 90'/30' 1000 h at Pn 70 °C ambient	± 0.5 %	± 0.15 % or 0.05 Ω
	10 000 h at Pn	-	± 0.25 % or 0.05 Ω
Shelf Life	1 year ambient temperature	-	< ± 0.05 %

NOISE LEVEL

In a frequency decade, the average noise level is 0.1 μV/V for models RCMT08, RCMT1, RCMT2 and RCMT4 in all ohmic values. It progressively increases as a function of the ohmic value and can reach 0.2 μV/V for the highest values of models RCMT02 and RCMT05 (0.1 μV/V for R < 10 kΩ).

SPECIAL APPLICATIONS

Temperature coefficient tracking to 5 ppm.

Tolerance matching to 0.05 %.

Selection of positive or negative TCR in temperature range of - 20 °C to + 125 °C.

For these applications and other requirements consult VISHAY SFERNICE.

RECOMMENDATION

The lower the ohmic value, the more important the influence of lead resistance is on measurements. The nominal resistance value is therefore measured at a distance of 5 mm from resistor body.



Molded Metal Film High Stability (< 0.25 % after 1000 h)
High Temperature (up to 175 °C) Precision Resistors

Vishay Sfernice

MARKING

Printed: series, style, NF style if applicable, ohmic value (in Ω), tolerance (in %), temperature coefficient, manufacturing date.
Due to lack of space, RCMT 02 is referenced as MT 02.

GLOBAL PART NUMBER INFORMATION															
R	C	M	T	0	2		1	3	0	0	1	F	H	S	1 4
GLOBAL MODEL	SIZE	SPECIAL	OHMIC VALUE				TOLERANCE			TEMPERATURE COEFFICIENT			PACKAGING		
RCMT	01 02 05 08 10 20 40	As applicable. Contact us.	The first four digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point. 13001 = 13 k Ω 33001 = 33 k Ω 220R0 = 220 Ω 1R220 = 1.22 Ω				B = 0.1 % A = 0.2 % D = 0.5 % F = 1 %			H = K3, 50 ppm/K E = K4, 25 ppm/K D = K5, 15 ppm/K			AM500 = A20 BAG100 = S14 BAG50 = S09 BAG10 = S03 BO50* = B25 *: possible in N/A		



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.